

Building Energy Rating (BER)

BER for the building detailed below is:

F


Address CHURCH STREET
BAILIEBOROUGH
CO. CAVAN

BER Number 106110240
Date of Issue 11/02/2014
Valid Until 11/02/2024
Assessor Number 102217
Assessor Company No 102217

The Building Energy Rating (BER) is an indication of the energy performance of this dwelling. It covers energy use for space heating, water heating, ventilation and lighting, calculated on the basis of standard occupancy. It is expressed as primary energy use per unit floor area per year (kWh/m²/yr).

'A' rated properties are the most energy efficient and will tend to have the lowest energy bills.

Building Energy Rating kWh/m²/yr MOST EFFICIENT

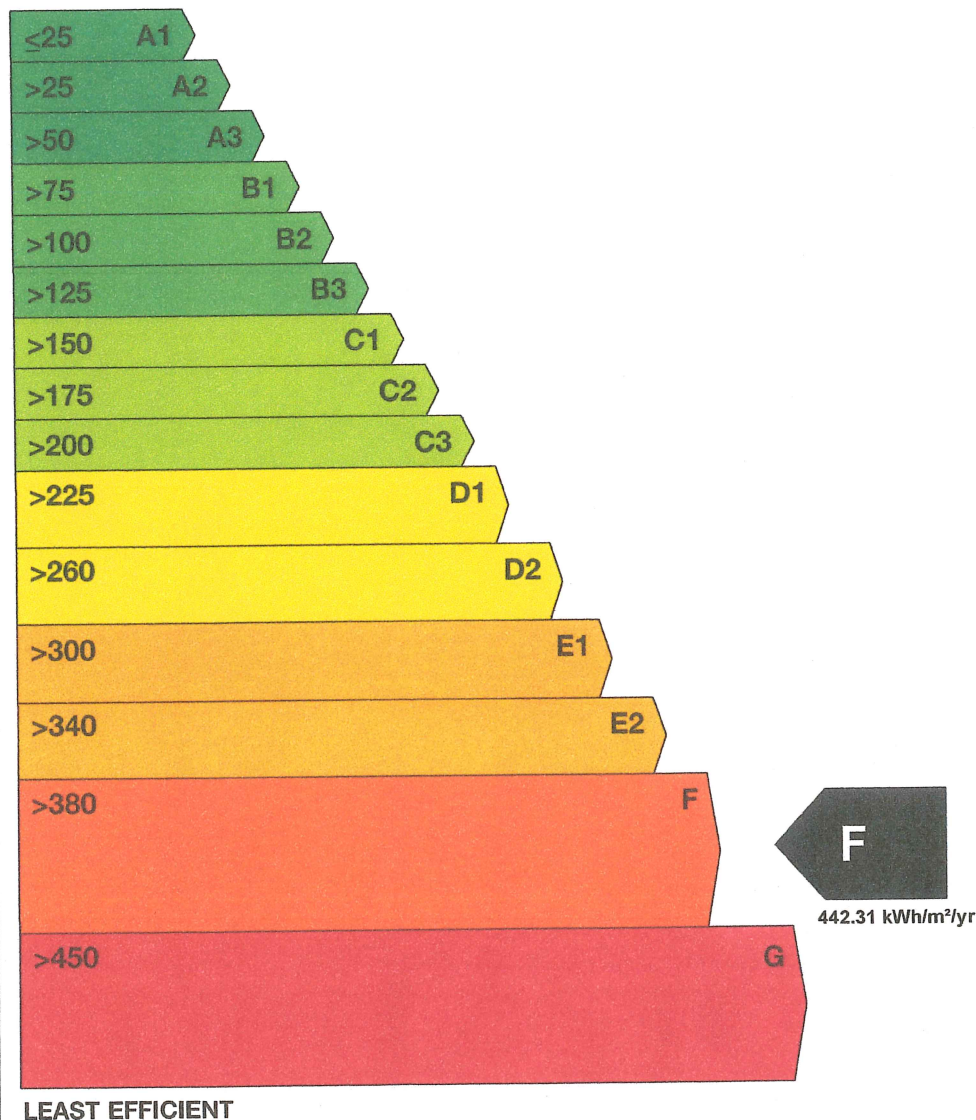

LEAST EFFICIENT

Carbon Dioxide (CO₂) Emissions Indicator kgCO₂/m²/yr

BEST
0

WORST
>120

Calculated
annual CO₂
emissions

113.58 kgCO₂/m²/yr

The less CO₂ produced, the less the dwelling contributes to global warming.

IMPORTANT: This BER is calculated on the basis of data provided to and by the BER Assessor, and using the version of the assessment software quoted below. A future BER assigned to this dwelling may be different, as a result of changes to the dwelling or to the assessment software.



Building Energy Rating (BER) ADVISORY REPORT

Energy use in our homes is responsible for more than a quarter of Ireland's total CO₂ emissions. Reducing energy use will save you money and is good for the environment. This report provides advice on improving your Building Energy Rating, reducing your energy usage and costs, while improving the comfort and condition of your home.

Report Date: 11/02/2014

Assessor: Robert Mulholland
Address: CHURCH STREET
BAILIEBOROUGH
CO. CAVAN
BER: 106110240
MPRN: 10014414518

About this Advisory Report

Energy use in our homes is responsible for almost a quarter of Ireland's total CO₂ emissions. Reducing energy use will save you money and is good for the environment. This report provides advice on improving your BER, reducing your energy usage and costs, while improving the comfort of your home. The improvement measures recommended in this report are not mandatory and can be completed at your own discretion. Some improvements may require the use of suitably qualified installers or professional advice. All works should be completed to the relevant health and safety standards. Where applicable, works should be completed to the relevant Building Regulations.

In this report an associated cost and impact are provided for the recommendations specific to your home. Costs and impacts are divided into categories and these are defined as follows:

Low Cost are improvements that are expected to cost less than 100 euro to complete.

Medium Cost are improvements that are expected to cost 100 euro to 1,000 euro to complete.

High Cost are improvements that are expected to cost more than 1,000 euro to complete.

The above costs are guidelines only and actual costs will vary depending on house size, work specification and market conditions.

Low Impact are measures that will make a small improvement in energy efficiency.

Medium Impact are measures that will make a medium improvement in energy efficiency.

High Impact are measures that will make a large improvement in energy efficiency.

Implementing any improvement measure will reduce your energy consumption. When implementing improvements it is sensible to prioritise those with a low cost and a high impact first. The money saved by reducing energy usage can help to pay for the improvement measures. Moreover apart from increasing the comfort and costs the

Heat loss through an un-insulated roof of a typical house can account for up to 30% of the total heat loss. Installing insulation will reduce this heat loss, and hence reduce the energy demand of the dwelling. A U-Value is the measure of the heat loss through the fabric of the building. The lower the U-Value the better and the higher the U-Value the greater the heat loss. Modern pitched roofs or habitable roof spaces that are insulated between the rafters, have a U-Value less than or equal to 0.2. Modern flat and pitched roofs that are insulated at ceiling level, have a U-Value less than or equal to 0.16. Blanket insulation, rigid board insulation or expanding foam may be used to achieve the required insulation level. Loose beads may also be used for roofs insulated on the ceiling. Installing roof insulation generally involves a considerable amount of work. The attic/roof space must have adequate ventilation to prevent dampness. This is achieved by leaving a continuous air gap along the eaves at each side. Electric cables should not be buried under insulation. Leave clearance for recessed lights to avoid them overheating. For further details please refer to publication 'A Detailed Guide to Insulating Your Home' available on www.seai.ie

Part of the pitched roof insulated on the ceiling in this dwelling has a U-Value of less than 1.5 and greater than or equal to 0.4.

The insulation in this roof can be significantly improved.

Cost: Medium **Impact:** Medium

Walls

Heat loss through the walls can account for up to 30% of the total heat loss. This can typically be reduced by two-thirds by insulating the walls and so reduce the energy demand of the dwelling. A U-Value is a measure of the heat loss through the building fabric. The lower the U-Value the better and the higher the U-Value the greater the heat loss. Walls with a U-Value greater than 0.27 could be improved. Insulation may be installed as cavity fill. This is where the gap between the inner and outer layers of external walls is filled with an insulating material. If cavity insulation is not applicable or is not technically possible, insulation may be installed internally or externally. Internal insulation involves a layer of insulation being fixed to the inside surface of external walls, and a suitable fire resistant finish being incorporated or applied. External solid wall insulation is the application of an insulant and a weather-protective finish to the outside of the wall.

For further details please refer to publication 'A Detailed Guide to Insulating Your Home' available on www.seai.ie

Part of the wall area in this dwelling has a U-Value of greater than or equal to 1.1.

The insulation in this wall can be greatly improved.

Cost: High **Impact:** High

Windows

Glass allows heat to escape more readily than most other building materials. For this reason, it is important that the windows are as energy efficient as possible. Windows can account for around 15% of the heat loss in your home. Installing energy efficient windows such as low-E double glazing helps to retain heat and improves comfort through elimination of cold window surfaces and associated draughts and

condensation. The use of shutters, lined curtains and blinds can improve heat retention at night and further reduce draughts.

A U-Value is a measure of the heat loss through the building fabric. The lower the U-Value the better and the higher the U-Value the greater the heat loss. Windows with a heat loss greater than the current building standards (i.e. have a U-Value greater than 2) could be improved. The best benefits are achieved through replacing single glazed windows with low-E double glazing or triple glazing.

Note that single glazing can also be improved by adding secondary glazing (installing a secondary window and frame on the room side of the existing window).

Some of the windows in this dwelling with a U-Value of greater than or equal to 4. The heat loss through these windows can be greatly reduced.

Cost: High **Impact:** High

Doors

Heat is lost from dwellings through doors which often have relatively poor thermal insulation compared to other elements of the building. Installing insulated doors will reduce this heat loss, and also generally reduce draughts through air gaps at the frames. Replacement doors, whether glazed or half glazed, should have insulated cores. A U-Value is a measure of the heat loss through the fabric of the building. The lower the U-Value the better and the higher the U-Value the greater the heat loss. Doors with a U-Value greater than 2.0 could be improved. For further details please refer to publication 'A Detailed Guide to Insulating Your Home' available on www.seai.ie

Part of the door area in this dwelling has a U-Value of less than 4 and greater than or equal to 2.7.

The heat loss through this door area can be significantly reduced.

Cost: Medium **Impact:** Low

Cylinder Timer / Thermostat

The hot water cylinder in this dwelling should have both a cylinder timer and cylinder thermostat.

Consider installing a hot water cylinder timer and thermostat to reduce unnecessary heat loss from the hot water cylinder. A hot water cylinder thermostat enables the boiler to switch off when the water in the cylinder reaches the required temperature.

This minimises the amount of energy that is used and lowers fuel bills.

The best setpoint for the thermostat is 60°C. Setting the temperature lower than this presents a health risk. Setting the temperature higher than this wastes energy.

Cost: Medium **Impact:** Low

Lighting

General Operational Advice on Lighting

Compact Fluorescent Lamps (CFLs) use 20% of the energy used by typical incandescent bulbs to give the same amount of light. A 22 Watt CFL has the same light output as a 100 Watt incandescent. LED (Light-emitting diode) lights use less than 10% of the energy required for corresponding tungsten lights. Low energy lighting will give highest savings in rooms that are most often used.

Lighting - Low Energy Bulbs

The low energy lighting in this dwelling is less than 50%.

Replacement of traditional light bulbs (tungsten or incandescent) with energy saving bulbs (CFL or LED) can reduce lighting costs significantly. They also last considerably longer than ordinary light bulbs thereby saving on replacement costs. Consider replacing traditional light bulbs with energy saving bulbs.

Cost: Low **Impact:** Medium

Distribution System Losses and Gains (Control Category)

The heating system controls in this dwelling could be improved.

The heating system would benefit from a programmer/timer and room thermostat to enable the boiler to switch off when no heat is required. A seven day programmer will allow you to customise a heating schedule to meet your specific heating needs for each day of the week. This would reduce the amount of energy used and lower your fuel bills.

Thermostatic radiator valves (TRVs) could also be installed to allow the temperature of each room to be controlled to suit individual needs, adding to comfort and reducing heating bills. For example, they can be set to be warmer in the living room and bathroom than in the bedrooms. TRVs should be fitted to every radiator excluding the radiator in the same room as the room thermostat and to the radiator/towel rail in the bathroom. The room thermostat is needed as well as the TRVs, to enable the boiler to switch off when no heat is required.

Cost: Medium **Impact:** Medium

Main Heating System

General Operational Advice on Main Heating System

You should have your boiler professionally serviced at least once per year. A clean and serviced appliance will operate more economically and will have a longer service life.

Efficiency of Main Heating System (Gas or Oil)

This dwelling has an oil/gas main heating system. The efficiency of the boiler is less than 70%.

If your boiler is over 15 years old and/or has an efficiency of less than 80% you should consider upgrading it to a condensing boiler. A condensing boiler is capable of much higher efficiencies than other types of boiler, meaning it will burn less fuel to heat this dwelling. Boilers with an efficiency of over 90% are available on the market. While boiler upgrades can be undertaken at your own discretion, please note that, in the case of replacement boilers, it is a mandatory requirement under current Building Regulations that a replacement boiler has a minimum efficiency of 86%. When an old boiler is due for repair or replacement it is usually more cost effective to replace it with a condensing boiler. Condensing boilers need a drain for the condensate which may limit where they can be located. This can be borne in mind if you are considering remodelling the room containing the existing boiler even if the existing boiler is to be retained for the time being. Renewable or Low Carbon heat sources should also be considered as replacements for oil or gas boilers. Two such alternatives are biomass boilers and heat pumps. A biomass boiler burns renewable fuel such as wood pellets

and therefore is less damaging to the environment than fossil fuels. Heat pumps transfer the heat stored in the ground or outside air into the home for heating or hot water. Biomass boilers could also be considered as a low carbon dioxide direct alternative to a gas or oil boiler. Biomass boilers usually require more fuel storage space than gas/oil boilers. Heat pumps could also be used to improve energy consumption levels but are not as easily retrofitted, particularly when the dwelling does not have underfloor heating.

Cost: High **Impact:** High

General Advice on Energy Use in Your Home

The way we use energy in our homes can reduce energy consumption. Some simple everyday measures will save money, improve comfort and reduce your impact on the environment. Some of these are outlined below.

Appliances: New kitchen appliances carry an energy rating label which rates energy efficiency on a scale of A to G. When buying new appliances look for A rated products which are more energy efficient and cost less to run. Do not under or overload appliances, such as dishwashers and washing machines. For washing machines, a 40°C rather than a 60°C wash cycle cuts electricity use by approximately a third. (Modern washing powders and detergents can work equally effectively at lower temperatures.) Defrost your freezer regularly to save energy and extend the operating life. Equipment on standby uses up to 20% of the energy it would use when fully on. When an appliance is not in use, turn it off fully.

Lighting: Avail of natural daylight whenever possible and avoid leaving electric lights switched on in unoccupied rooms. All lighting lamps carry an energy label similar to that on appliances (i.e. an A to G label) so always choose the most efficient to suit your particular needs.

Useful Links and Sources of Further Information

Useful energy saving tips are available on www.change.ie (Tel. 1890 242643) and www.powerofone.ie. For specific queries on BER please contact SEAI on 1890734237 or by email info@ber.seai.ie. There are many useful documents available on The Sustainable Energy Authority of Ireland's (SEAI) website www.seai.ie

The most recent Technical Guidance Documents for the Building Regulations and other supporting documents are available from the Department of Environment, Heritage and Local Government website www.environ.ie on the link to Building Standards (Tel. 1890 202021). Some of these documents are listed below.

Technical Guidance Document Part L Conservation of Fuel and Energy - Dwellings;
Technical Guidance Document Part J Heat Producing Appliances;
Technical Guidance Document Part F Ventilation.

When performing building works it is important to take the correct health and safety measures. Useful health and safety information on ventilation, radon and combustion devices can be found on the Carbon Monoxide safety website:

www.carbonmonoxide.ie Tel. 1850797979 and The Radiological Protect Institute of Ireland website www.rpii.ie/radon Tel. 01 269 77 66.

Please consider the environment before printing this document

Further advice on improving the energy efficiency of your home is available from
the Sustainable Energy Authority of Ireland, www.seai.ie

Wilton Park House, Wilton Place, Dublin 2, Ireland
Teach Pháirc Wilton, Plás Wilton, Baile Átha Cliath 2, Éireann

T. +353-1-8082100
F. +353-1-8082002

info@seai.ie
www.seai.ie



Ireland's EU Structural Funds
Programmes 2007-2013
Co-funded by the Irish Government
and the European Union

The Sustainable Energy Authority of Ireland is financed by Ireland's EU Structural
Funds Programme co-funded by the Irish Government and the European Union